



Features:

- 4 Digit, 7 segment LED
- 0.01 Resolution
- Available in 240V AC

Size: 72mm x 72mm

Certifications: CE  PENDING

Technical Specifications

Display

| | |
|--------------|-----------------------|
| Display | 7 segment LED Display |
| Digit | 4 |
| Digit Height | 0.56" (14.2mm) |

Input Specifications

| | |
|------------------------|------------------------|
| Electrical Connection | 1Ø - 2 wire |
| Input Voltage Range | Self Powered |
| Measurement Range | 45.00 - 65.00 Hz |
| Resolution | 0.01 |
| Accuracy | ± 0.05 Hz |
| Over Range Indication | "Ovfr" (Over 65.00 Hz) |
| Under Range Indication | "Ur" (Under 45.00 Hz) |

Supply Specifications

| | |
|------------------|---------------------------|
| Auxiliary Supply | 240V AC ±20%, (45 - 65Hz) |
|------------------|---------------------------|


Environmental Specifications

| | |
|---------------------------|--|
| Temperature | Operating: 0 to 50°C (32 to 122°F) Storage: 0 to 70°C (32 to 158°F) |
| Humidity (non-condensing) | Upto 85% RH |


Mechanical Specifications

| | |
|------------------|--------------------|
| Mounting | Panel mount |
| Weight | 190 gms |
| Protection Level | IP65 for faceplate |

Dimensions

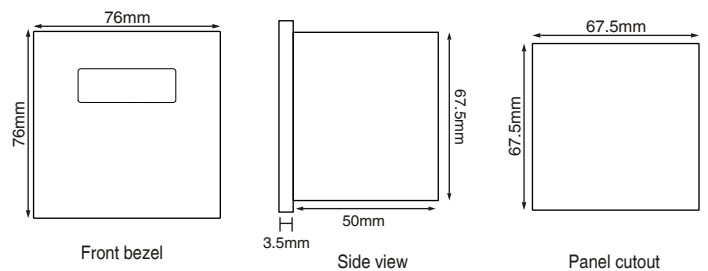

Terminal Connections

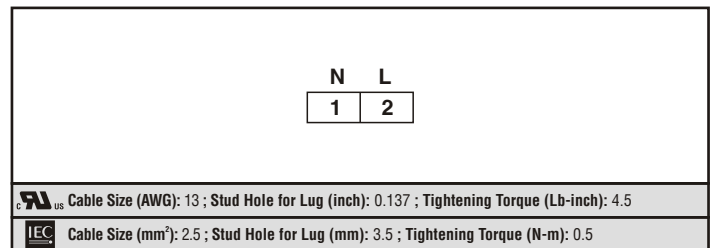

Ordering Information

| Part No. | Supply Voltage |
|----------|----------------|
| | 240V AC |
| MF216 | ■ |