



## Features:

- 3Ø - 3 Wire Input
- Monitors , Phase Sequence, Under Voltage, Over Voltage
- Trip delay (T) -0.2 to 10Sec
- LED Indication: Relay ON, Power ON
- Slim, Space Saving Design
- DIN Rail Mount

Size: DIN 17.5mm

Certifications:

## Technical Specifications

### Input Specifications

Accuracy (Trip Voltage)	±0.5% of F.S. (F.S. = Full Scale)
Reset	Auto reset on removal of fault condition

### Output Specifications

Output Contact	SPDT (1 C/O)
Contact Rating	NO/5A, NC/3A@250V AC

### Functional Specifications

Phase Sequence,	Yes
Under Voltage	310 to 405V AC
Over Voltage	425 to 520V AC
Trip delay (T)	0.2 to 10sec
Power On Delay	400 msec
Accuracy (Trip time)	±5% of F.S. (F.S. = Full Scale)

### Supply Voltage

Nominal Input Voltage	415V AC
Power Consumption	20VA max
Operating Voltage	310 to 520V AC


### Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	Upto 95% RH
Weight	62 gms
Protection Level	IP50 for faceplate IP40 for housing IP20 for terminals

### LED Indication Chart


Supply	Relay LED	Power LED
Nominal condition	ON	ON
Phase reversed	OFF	ON
UV / OV	OFF	ON

### Dimensions

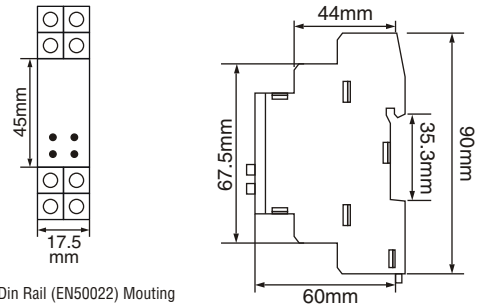

Symmetrical 35mm Din Rail (EN50022) Mounting


### Terminal Connections

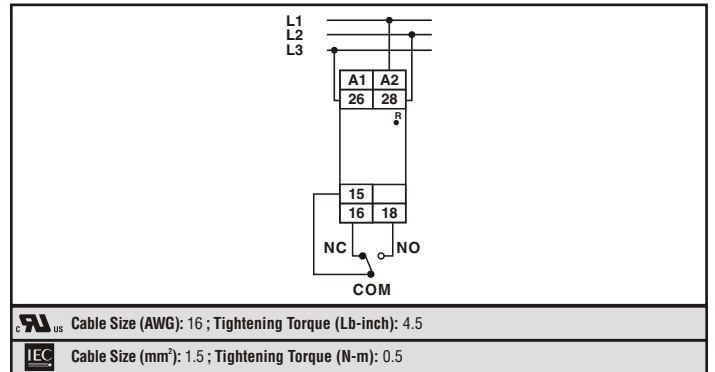

Cable Size (AWG): 16 ; Tightening Torque (Lb-inch): 4.5

Cable Size (mm²): 1.5 ; Tightening Torque (N-m): 0.5

### Timing Diagram

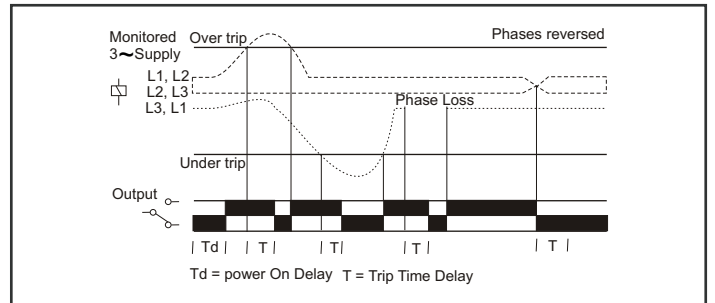

## Ordering Information

Part No.	Supply Voltage	Certification
600VPR-310/520	3Ø/3W, 310 to 520V AC, P-P	
600VPR-310/520	3Ø/3W, 310 to 520V AC, P-P	



## Features:

- 3Ø - 3 Wire Input
- Monitors , Phase Sequence, Under Voltage, Over Voltage
- Trip delay (T) -0.2 to 10Sec
- LED Indication: Relay ON, Power ON
- Slim, Space Saving Design
- DIN Rail Mount

Size: DIN 17.5mm

Certifications: PENDING

## Technical Specifications

### Input Specifications

Accuracy (Trip Voltage)	±0.5% of F.S. (F.S. = Full Scale)
Reset	Auto reset on removal of fault condition

### Output Specifications

Output Contact	SPDT (1 C/O)
Contact Rating	NO/5A, NC/3A@250V AC

### Functional Specifications

Phase Sequence,	Yes
Under Voltage	170 to 224V AC
Over Voltage	236 to 290V AC
Trip delay (T)	0.2 to 10sec
Power On Delay	400 msec
Accuracy (Trip time)	±5% of F.S. (F.S. = Full Scale)

### Supply Voltage

Nominal Input Voltage	230V AC
Power Consumption	20VA max
Operating Voltage	170 to 290V AC


### Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	Upto 95% RH
Weight	62 gms
Protection Level	IP50 for faceplate IP40 for housing IP20 for terminals

### LED Indication Chart


Supply	Relay LED	Power LED
Nominal condition	ON	ON
Phase reversed	OFF	ON
UV / OV	OFF	ON

### Dimensions

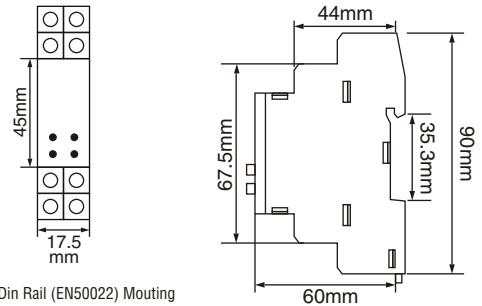

Symmetrical 35mm Din Rail (EN50022) Mounting


### Terminal Connections

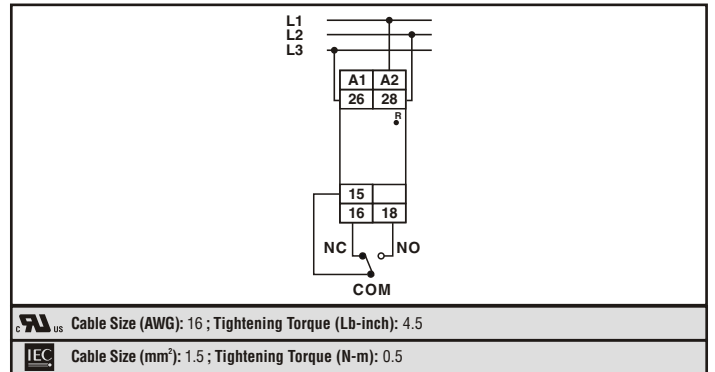

Cable Size (AWG): 16 ; Tightening Torque (Lb-inch): 4.5

Cable Size (mm²): 1.5 ; Tightening Torque (N-m): 0.5

### Timing Diagram

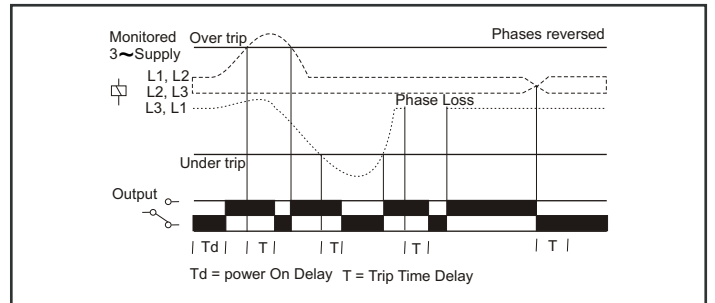

## Ordering Information

Part No.	Supply Voltage	Certification	
			Pending
600VPR-170/290	3Ø/3W, 170 to 290V AC, P-P	■	
600VPR-170/290-CU	3Ø/3W, 170 to 290V AC, P-P	■	■